
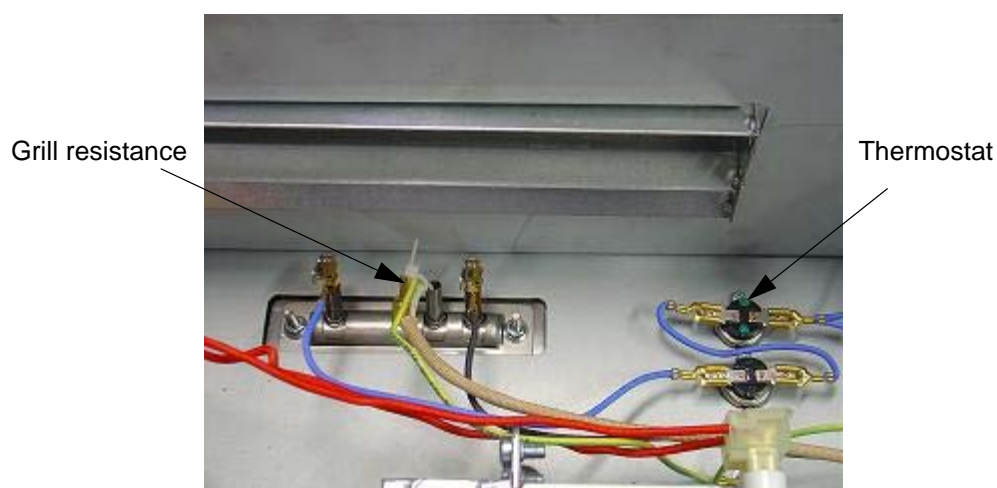


## Grill heater doesn't work

**References involved:** MC 32 BIS; MW 32 BIS; MW 32 BIT

If the grill heater doesn't work it is necessary to confirm the value between the terminals with the ohmmeter. The value of resistance should be approx. 33  $\Omega$ . If the value is infinite (open circuit) the grill heater is defective. Another characteristic that needs to be evaluated is the continuity of the thermostats.

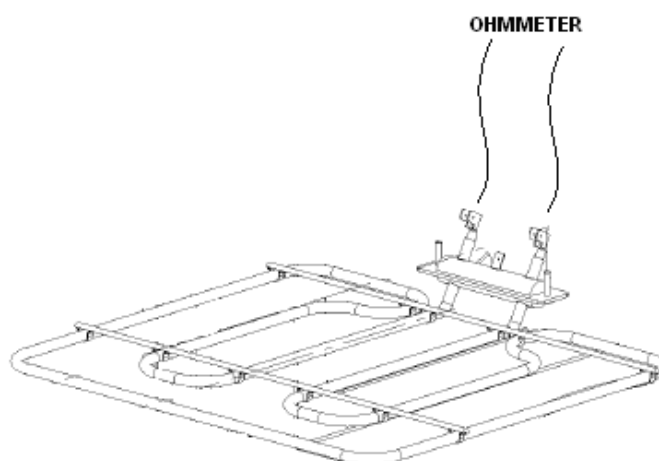

Spare-parts n. 162001 - Grill heater

Spare-parts n. 172037 - Thermal Protector

Spare-parts n. 162061 - Thermostat 90 °C