

ÍNDICE / TABLE OF CONTENTS

1	CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS	FEHLER! TEXTMARKE NICHT DEFINIERT.
1.1	ESPECIFICAÇÕES / SPECIFICATIONS.....	FEHLER! TEXTMARKE NICHT DEFINIERT.
1.2	NÍVEIS DE POTÊNCIA DE MICROONDAS / MICROWAVE POWER LEVELS	FEHLER! TEXTMARKE NICHT DEFINIERT.
1.3	ESQUEMA ELÉCTRICO / ELECTRICAL DIAGRAM.....	FEHLER! TEXTMARKE NICHT DEFINIERT.
2	DESENHOS DE EXPLOÇÃO / EXPLOSION DIAGRAM.....	4
2.1	MONTAGEM DA CAVIDADE / CAVITY ASSEMBLY.....	4
2.2	MONTAGEM DO VENTILADOR / FAN ASSEMBLY	6
2.3	MONTAGEM DO SISTEMA DE ABERTURA / DOOR INTERLOCK SYSTEM ASSEMBLY.....	8
2.4	MONTAGEM DO PAINEL DE COMANDOS / CONTROL PANEL ASSEMBLY.....	10
2.5	MONTAGEM DA PORTA / DOOR ASSEMBLY	12
2.6	MONTAGEM DOS COMPONENTES ELÉCTRICOS / ELECTRIC COMPONENTS ASSEMBLY.....	14
2.7	MONTAGEM DA ENVOLVENTE E ACESSÓRIOS / ENCLOSURE AND ACCESSORIES ASSEMBLY.....	16
2.8	MONTAGEM DO FRONTAL E ACESSÓRIOS / FRONT AND ACCESSORIES ASSEMBLY.....	18

MODIFICAÇÕES EFECTUADAS NA PRESENTE REVISÃO / CHANGES DONE IN THE PRESENT REVISION:

- Primeira emissão do documento.
Document first issue.

1 TECHNICAL CHARACTERISTICS

1.1 SPECIFICATIONS

AC Line Voltage	230 V / 50 Hz
Fuse Link	12 A / 250 V
Rated Power.....	1200 W
Microwave Output Power	1050 W
Microwave Frequency	2450 MHz
External Dimensions (W×H×D)	480 × 305 × 315 mm
Cavity Dimensions (W×H×D)	305 × 210 × 280 mm
Oven Capacity	18 ltr
Weight	21 kg


1.2 MICROWAVE POWER LEVELS

The microwave energy level regulation is performed by connecting the microwave generator circuit during a variable fraction of a 30 seconds cyclic period. For example, an equivalent 50% microwave energy level is obtained by connecting the microwave power circuit for 15 seconds and disconnecting it by the remaining 15 seconds.

The following table presents the several energy levels corresponding to the different positions of the energy regulator.

Level	P 01	P 02	P 03	P 04	P 05
Power	160	320	480	640	800
Time On (s)	6	12	18	24	30
Time Off (s)	24	18	12	6	0

1.3 ELECTRICAL DIAGRAM

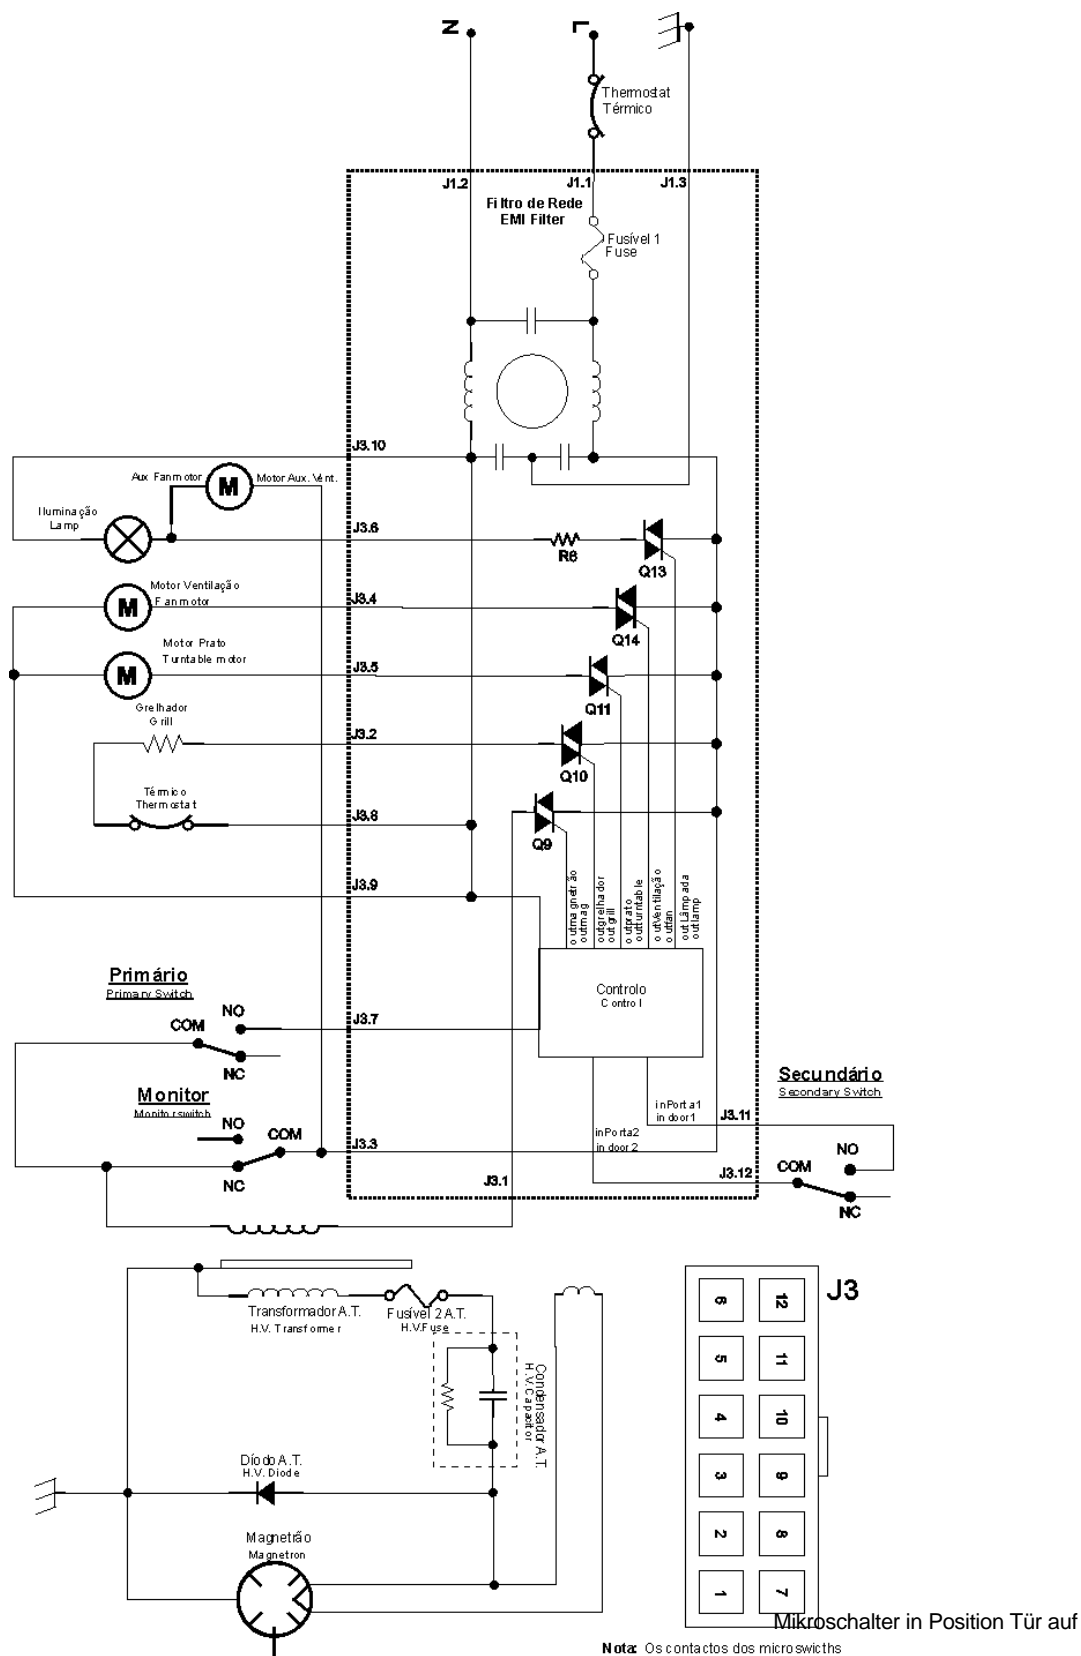

Nota: Os contactos dos microswitchs estão na situação de porta aberta.
Note: The microswitch are in open door situation.